
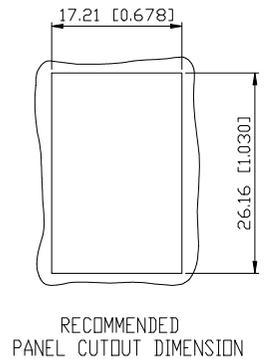
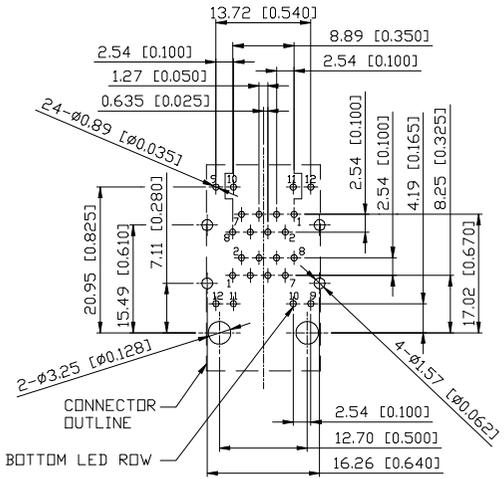
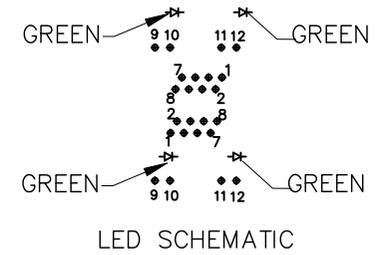
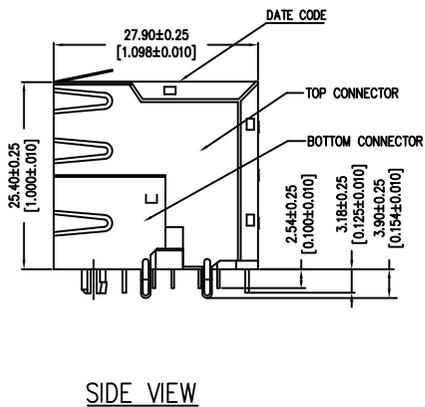


REV.	ECN. NO.	NAME	DATE

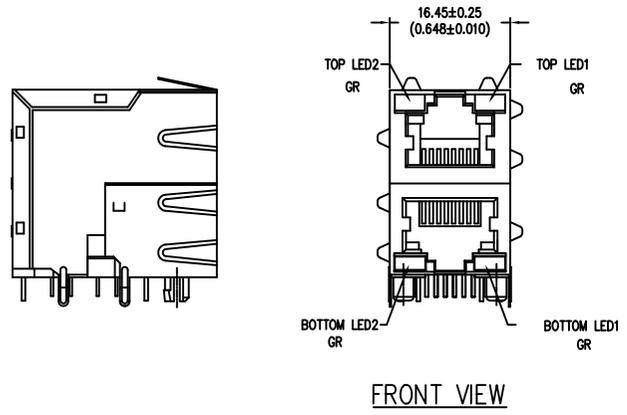

PART NO:

JS212154DP01

P-Housing PBT

- 1-gold plated 1u"
- 2-gold plated 3u"
- 3-gold plated 6u"
- 4-gold plated 15u"
- 5-gold plated 20u"
- 6-gold plated 30u"
- 7-gold plated 50u"

RoHS Compliant

- NOTES:
- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: T=0.30 mm PHOSPHOR BORNEZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 150u" TIN-LEAD ON TERMINATION END, 15u" GOLD ON CONTACT AREA.
SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH 30u" NICKEL ON TERMINATION END.
 - JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
 - PEAK SOLDERING RATING : +220°C
 - UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

PCB LAYOUT TOLERANCE .XX±0.05[0.002]

TOLERANCE UNSPECIFIED		 a vital connector company		FOR YOUR VITAL CONNECTION	
.0	± 0.38				
.00	± 0.25	TITLE: RJ45, W/LED, 8P,8C, Shielded, Thru Hole.			
.000	± 0.10	PART NO:	JS212154DP01	REV:	A
ANGLE	± 3.00°	CHECKED BY:	VTA	SIZE: A4	UNIT:mm
MANUFACTURING COPY		APPROVED BY:	QPF	PROJECTION	 http://www.vitalconn.com
				SHEET:10F1	FCN: A5