
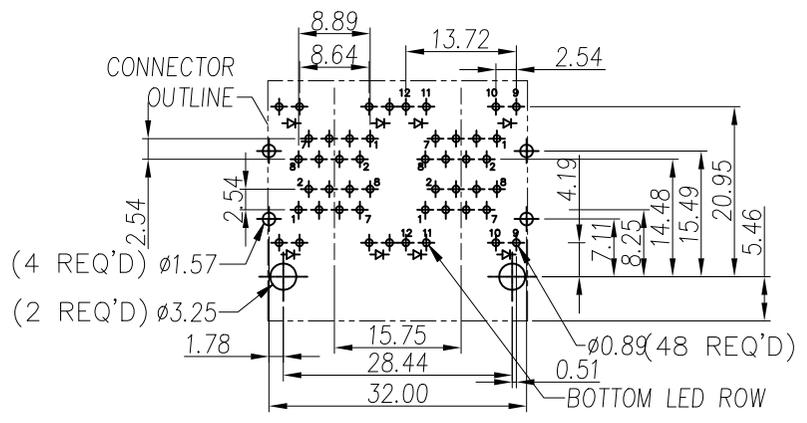
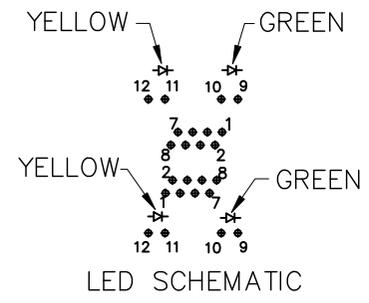


REV.	ECN. NO.	NAME	DATE

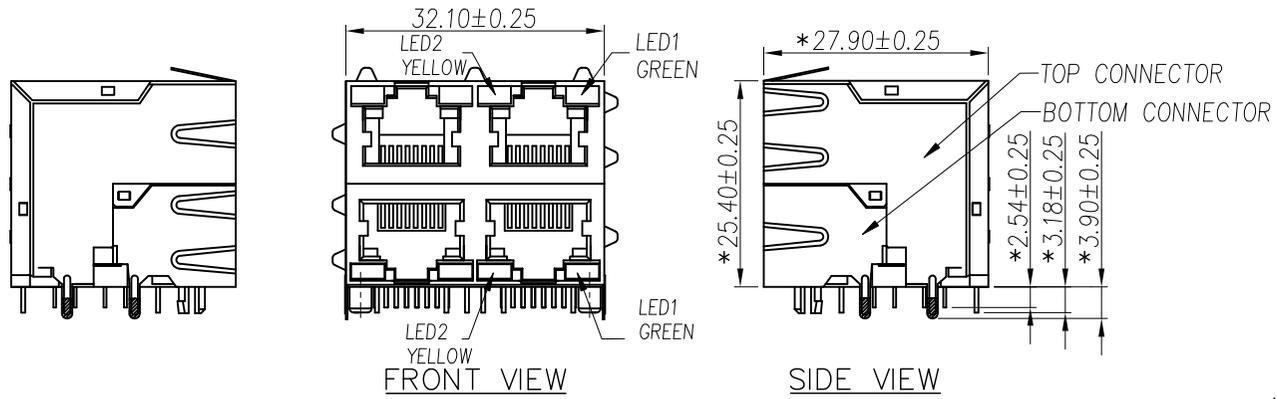

SUGGESTED PCB LAYOUT TOLERANCE
 $XX \pm 0.05 [0.002]$

NOTES:
 1. MATERIAL:
 HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, PBT UL 94V-0
 CONTACT: PHOSPHOR BORNZE, T=0.35MM.
 SHELL: BRASS, T=0.25MM.
 2. FINISH:
 CONTACT: 50u" MIN. NICKEL UNDERPLATING ALL AREA,
 100u" MIN. TIN ON SOLDER TAILS,
 3u" MIN. GOLD PLATING ON CONTACT AREA.
 SHELL: 30u" MIN. NICKEL UNDERPLATING ALL AREA
 SHELL: T=0.25mm COPPER ZINC ALLOY PLATED WITH NICKEL
 3. OPERATING TEMPERATURE: -40°C ~ +85°C.
 4. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

PART NO: JS222112DP01

- 4P-Housing PBT
- 1-gold plated 1u"
- 2-gold plated 3u"
- 3-gold plated 6u"
- 4-gold plated 15u"
- 5-gold plated 20u"
- 6-gold plated 30u"
- 7-gold plated 50u"

RoHS Compliant

TOLERANCE UNSPECIFIED		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
.0	± 0.38			TITLE: RJ45, W/LED, 8P,8C, Shielded, Thru Hole.	
.00	± 0.25	DRAWN BY:	BECKER	PART NO:	JS222112DP01
.000	± 0.10	CHECKED BY:	VTA	SIZE: A4	UNIT:mm
ANGLE	± 3.00°	APPROVED BY:	QPF	PROJECTION	SHEET:10F1
MANUFACTURING COPY				FCN: A5	http://www.vitalconn.com