
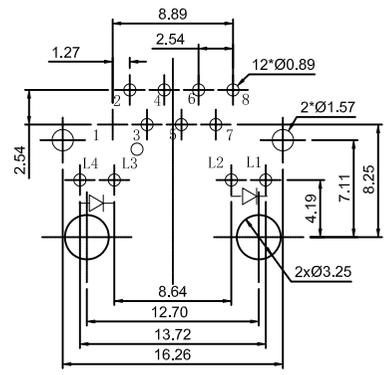
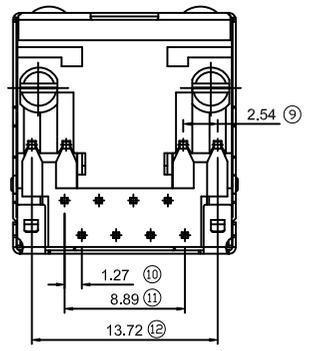
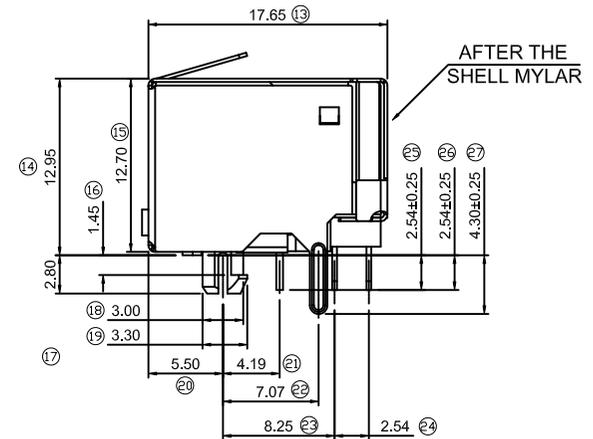
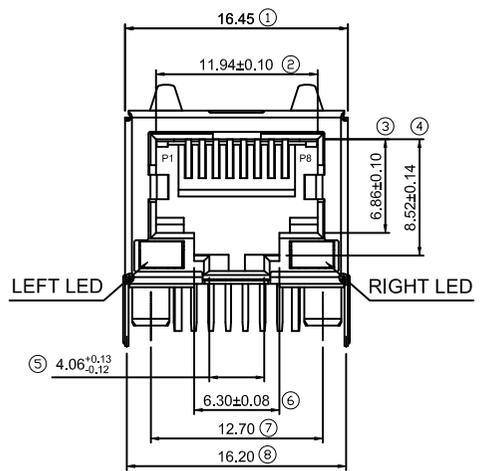
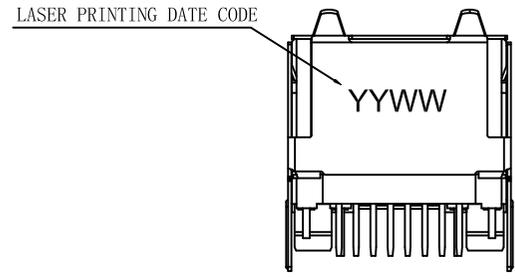


REV:	ECN. NO.	NAME	DATE



**SUGGESTED PCB LAYOUT**  
(TOP VIEW)  
DIMENSIONS TOLERANCE: .XX±0.05

**LED SCHEMATIC**


LEFT LED:YELLOW      RIGHT LED:GREEN

L4 + → - L3      L2 + → - L1

**NOTES:**

- MATERIALS:**  
HOUSING: PBT , BLACK (UL94V-0).  
CONTACTS: PHOSPHOR BRONZE.  
SHIELD: C2680,T=0.25mm
- FINISH:**  
CONTACT: 50U" NICKE LUNDERPLAT ON ALL AREA.  
100U"MIN. TIN ON SOLDERTAILS.  
G/F PLATED ON CONTACT AREA.  
SHIELD:COPPER ALLOY PLATED WITH NICKEL.
- OPERATING TEMPERATURE :** -40°C ~ +85°C.
- STORAGE TEMPERATURE:** -40°C ~ +85°C.
- JACK CAVITY CONFORMS TO FCC RULES AND. REGULATIONS PART 68, SUBPART F.**
- THIS PRODUCT IS A REFLOW SOLDERING PROCESS.**

**RoHS Compliant**

TOLERANCE UNSPECIFIED		 <b>VITALCON</b> a vital connector company		FOR YOUR VITAL CONNECTION	
.0	±0.38			TITLE: RJ45 8P8C 17.65 MM W/LED	
.00	±0.25	DRAWN BY: Zou Long		PART NO: JD114A11BPD7	
.000	±0.10	CHECKED BY: Bob		REV: A	
ANGLE	±3.00°	APPROVED BY: QPF		SIZE: A4	
MANUFACTURING COPY		PROJECTION		UNIT:mm	
				SHEET:1 OF 1	
				FCN: D7	
					
				<a href="http://www.vitalconn.com">http://www.vitalconn.com</a>	