

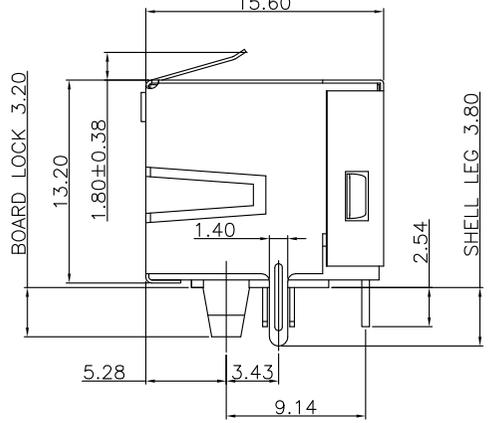
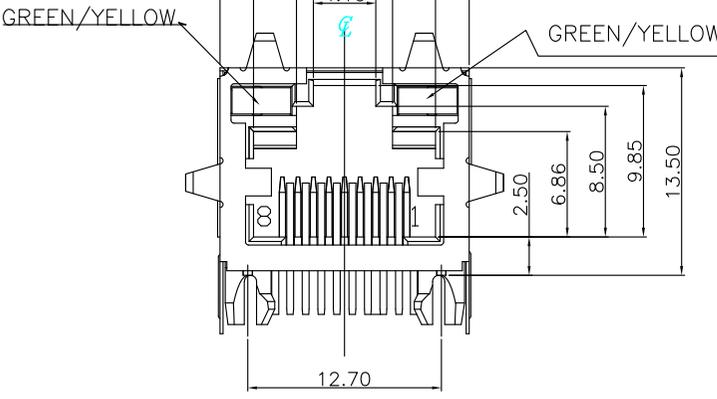


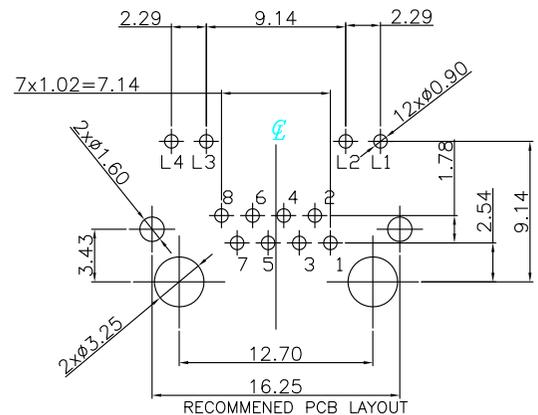

REV:	ECN. NO.	NAME	DATE



NOTES:

MATERIAL&PLATING:

1. HOUSING MATERIAL : PA9T BLACK UL 94V-0.

2. SHELL MATERIAL : COPPER ALLOY.

PLATING : NICKEL PLATING OVER ALL.

3. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.

PLATING : GOLD PLATING OVER NICKEL.

ELECTRICAL:

1. VOLTAGE RATING : 125 V.

2. CURRENT RATING : 1.5 AMP.

3. CONTACT RESISTANCE : 30 mΩ MAX.

4. INSULATION RESISTANCE : 1000 MΩ MIN.

5. DIELECTRIC WITHSTANDING : 1000 V.

MECHANICAL:

1. MATING FORCE : 30N MAX.

2. UNMATING FORCE : 50N MIN.

3. DURABILITY : 750 CYCLES.


ENVIRONMENT CHARACTERISTICS :

1. OPERATING TEMPERATURE : -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

JU1111AXDXF1

GOLD PLATING U"
1-Fu" 2-3u" 3-6u"
4-15u" 5-30u"

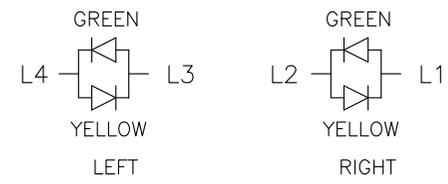



PLASTIC MATERIAL&COLOR:Black/Yellow/Gray

1-PBT+30%GF Black

2-PA46 Black

3-LCP Black

4-PA9T Black

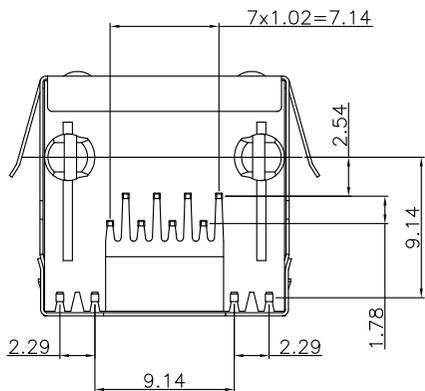

UNLESS OTHERWISE SPECIFIED TOLERANCES .X±0.35 X°±3.0° .XX±0.25 X°±2.0° .XXX±0.15 .XX°±1.0°		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
TITLE:		RJ45 1x1 Tab Up W/LED			
DRAWN BY:	Zou Long	PART NO:	JU1111AXDXF1	REV: A	
CHECKED BY:	Bob	SIZE: A4	UNIT:mm	SHEET:1 OF 1	FCN: F1
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	

For technical support, please send an email to support@vitalconn.com