



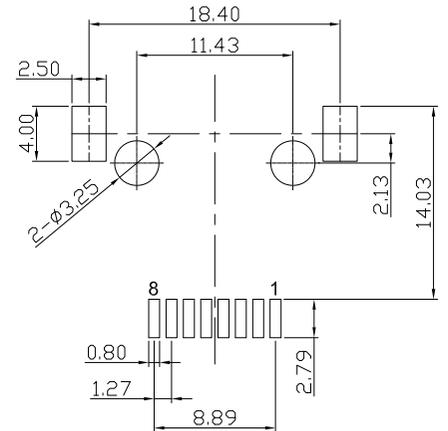



REV.	ECN. NO.	NAME	DATE

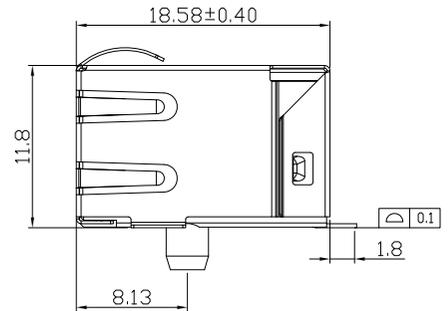

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

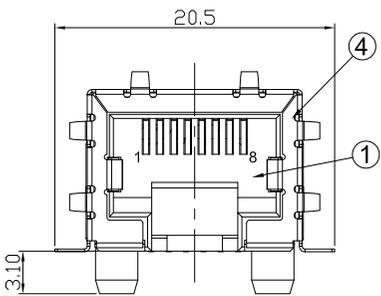

RECOMMENDED PCB LAYOUT
 TOP VIEW
 TOLERANCE:±0.05mm

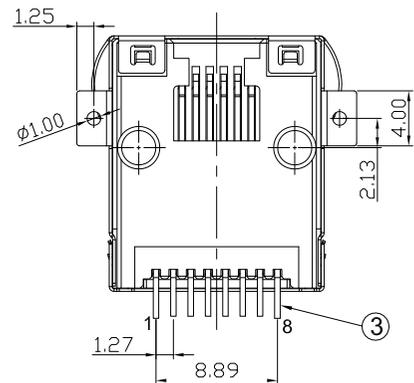

For IR Reflow Temperature: 260°C max., 10 sec max.

4	Shell	Phosphor Bronze	Nickel Plated
3	Terminal	Phosphor Bronze	Contact Area : Gold Plated Solder Area : Tin Plated
2	Cover	LCP	
1	Housing	LCP	
NO.	NAME	MATERIAL	FINISH

ROHS COMPLIANT

TOLERANCE UNSPECIFIED		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
0.000 mm ± 0.15 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.40 mm		TITLE: RJ45 1*1 Port Tab Down Shielded With EMI SMT Mounting with POST without LEDs			
DRAWN BY:	BECKER	PART NO:	JM114102DLC7	REV: A	
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET: 10F1	FCN: C7
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	