

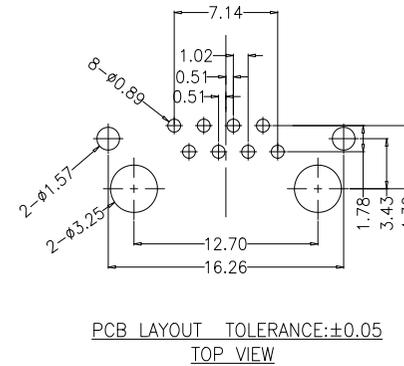

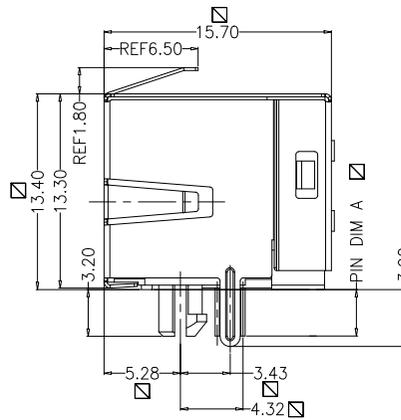



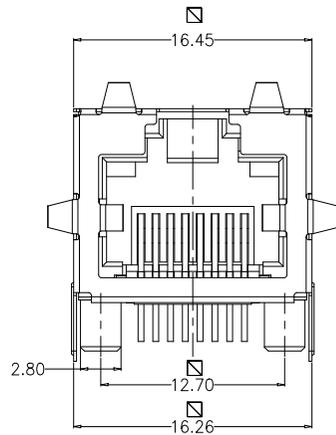

REV:	ECN. NO.	NAME	DATE



NOTES:

- MATERIAL:  
HOUSING: HIGH TEMP. THERMOPLASTIC, UL 94V-0, BLACK.  
CONTACT: PHOSPHOR BRONZE, T=0.30mm, 50u" NICKEL  
UNDERPLATE ON ALL AREA, 100u" TIN ON  
TERMINATION END, GOLD ON CONTACT AREA.  
SHELL: T=0.20mm COPPER ZINC ALLOY PLATED WITH NICKEL
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
PART 68, SUBPART F

GENERAL TOLERANCE  
.X ± 0.38 X.\* ± 2\*  
.XX ± 0.25 .X.\* ± 1\*  
.XXX ± 0.13



FOR YOUR  
VITAL CONNECTION

TITLE: RJ45 CONNECTOR 1\*1 PORT

DRAWN BY: Zou Long PART NO: JU114102DNH1 REV: A

CHECKED BY: Bob SIZE: A4 UNIT:mm SHEET: 1 OF 1 FCN: H1

APPROVED BY: QPF PROJECTION <http://www.vitalconn.com>

For technical support, please send an email to [support@vitalconn.com](mailto:support@vitalconn.com)