




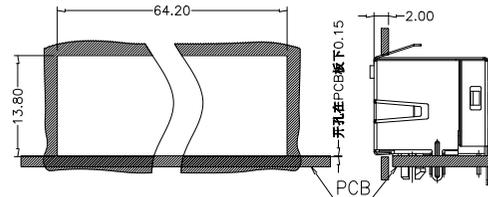




REV:	ECN. NO.	NAME	DATE

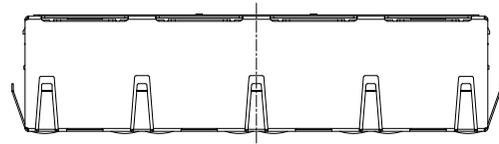


PANEL CUTOUT DIMENSION

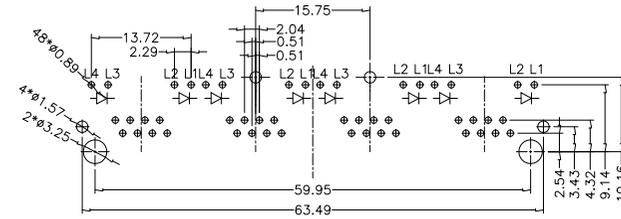

RECOMMENED PCB LAYOUT: ±0.05
TOP VIEW

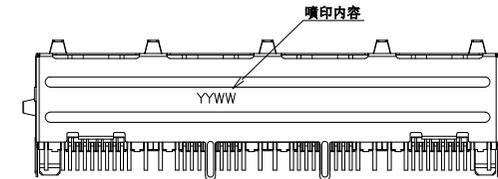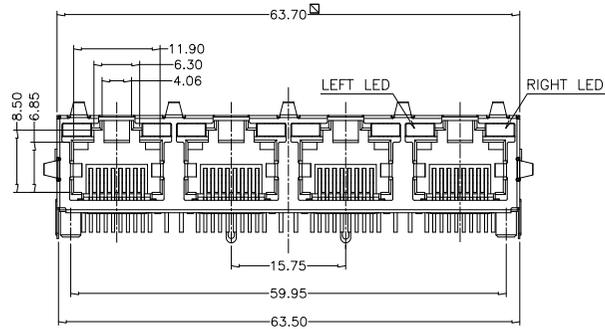


BACK VIEW

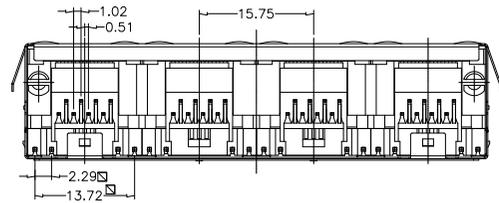


LED SCHEMATIC

LEFT LED1:
LEFT LED2:



RIGHT LED1:
RIGHT LED2:



NOTES:

- MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.30mm
SHELL:T=0.20mm COPPER
- FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
- OPERATING TEMPERATURE:-40°C~+85°C.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

GENERAL TOLERANCE .X± 0.38 X.*± 2* .XX± 0.25 .X.*± 1* .XXX± 0.13		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
TITLE:		RJ45 CONNECTOR 1*4 PORT W/LED, 8P8C,Shielded			
DRAWN BY:	Zou Long	PART NO:	JU1441D3DNH1	REV: A	
CHECKED BY:	Bob	SIZE: A4	UNIT:mm	SHEET:1 OF 1	FCN: H1
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	

For technical support, please send an email to support@vitalconn.com