

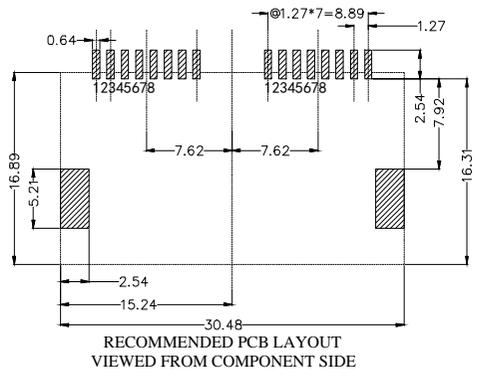

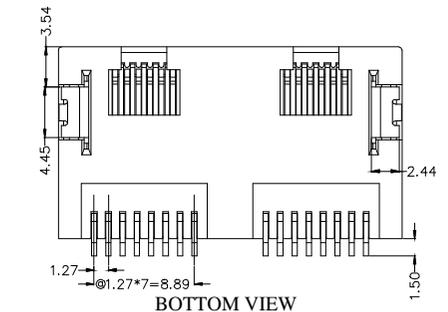


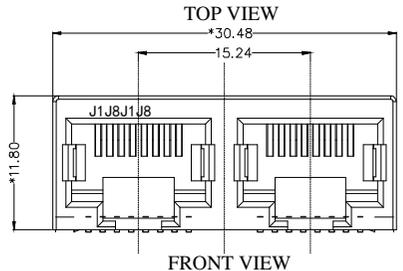


REV:	ECN. NO.	NAME	DATE

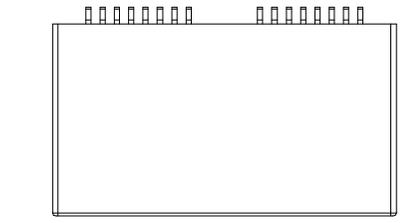


**MATERIAL:**  
 HOUSING: LCP,UL94V-0,BLACK.  
 TERMINAL: PHOSPHOR BRONZE T=0.35MM.  
 G/F/U" GOLD PLATING ON CONTACT AREA.

**MACHANICAL:**  
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 INSERTION FORCE: 2.2KG.F MAX.  
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.  
 OPERATING TEMPERATURE: -40 ~ +85 .  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ALL CRITICAL DIMENSIONS WITH "\*" :

**ELECTRICAL:**  
 VOLTAGE: 125 VOLTS AC.  
 CURRENT RATING : 1.5AMP.  
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN.  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
 AFTER 500V DC FOR 1 MINUTE.  
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
 INITIAL 50 MILLIOHMS MAX. AFTER  
 DURABILITY TEST.



GENERAL TOLERANCES UNLESS SPECIFIED		 FOR YOUR VITAL CONNECTION	
x±0.35	x°±3.0°		
.x±0.30	.x°±2.0°		
.xx±0.25	.xx°±1.5°		
.xxx±0.10	.xxx°±1.0°		
DRAWN BY: Zou Long	PART NO: JM120101ULA0	REV: A	
CHECKED BY: Bob	SIZE: A4	UNIT:mm	SHEET:1 OF 1 FCN: A0/F1
APPROVED BY: QPF	PROJECTION	 <a href="http://www.vitalconn.com">http://www.vitalconn.com</a>	

For technical support, please send an email to [support@vitalconn.com](mailto:support@vitalconn.com)