

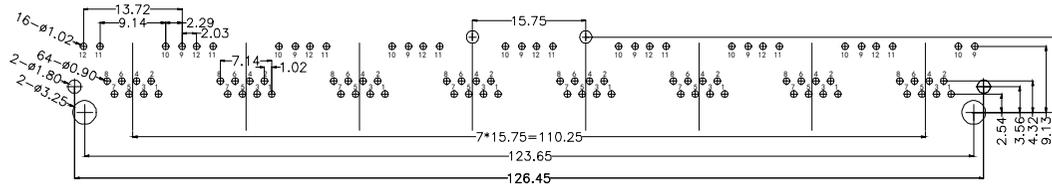
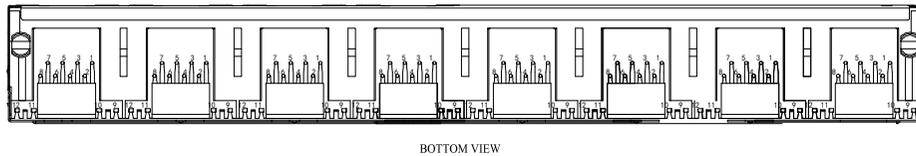




REV:	ECN. NO.	NAME	DATE

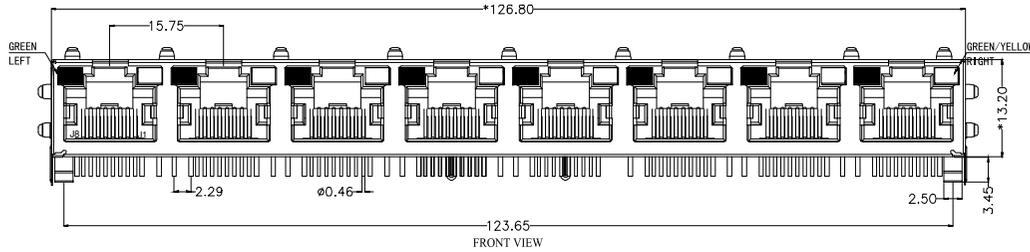


RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE

MATERIAL:
 HOUSING: PBT,UL94V-0, BLACK.
 TERMINAL: PHOSPHOR BRONZE Ø=0.46MM.
 G/FU" GOLD PLATING.
 SHIELD: C2680,T=0.20MM, 20 MIN NICKEL PLATING ON ALL AREA.


MACHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE : 2.2KG.F MAX.
 RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG .
 OPERATING TEMPERATURE: -40 ~ +85 .
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING : 1.5AMP.
 DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

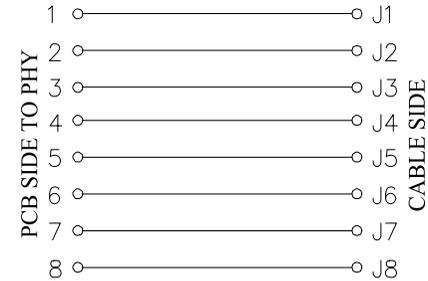

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V



GENERAL TOLERANCES UNLESS SPECIFIED	
x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°



FOR YOUR VITAL CONNECTION

TITLE:	56带屏蔽带灯 1X8 8P8C		
DRAWN BY:	Zou Long	PART NO:	JU184AD1DPA0
CHECKED BY:	Bob	SIZE: A4	UNIT:mm
APPROVED BY:	QPF	PROJECTION	UNIT:mm
SHEET:1 OF 1		FCN: A0	REV: A
http://www.vitalconn.com			

For technical support, please send an email to support@vitalconn.com