

REV:	ECN. NO.	NAME	DATE

A

B

C

D

E

F

A


B

C

D

E

F

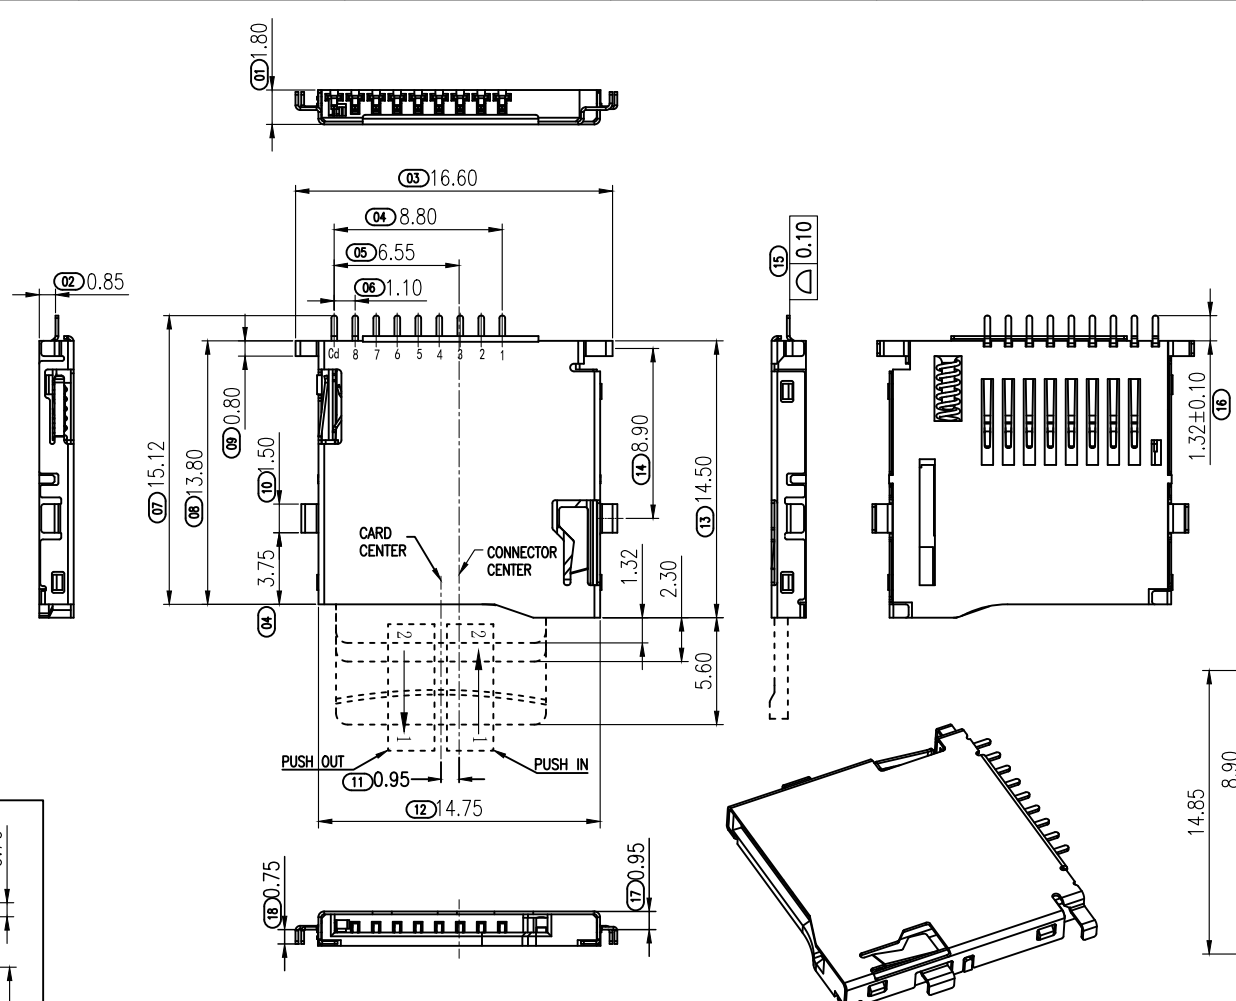


Specification

Material
 Plastic Housing: LCP 30%GF, UL94V-0, Black
 Contact Terminal: Phosphor Bronze, T=0.15mm
 Cover: SUS304, T=0.15mm

Plating:
 Contact Terminal
 Contact Area: Gold Flash
 Solder area: Tin 80u" min.
 Underplating: Ni overall 50u" min.
 Cover: Ni overall 30u" min.


Electrical
 Voltage Rating: 30V max.
 Current Rating: 0.5A max.
 Dielectric Withstanding Voltage: 100V AC (60 Sec min.)
 Insulation Resistance: 1000 MΩ min.
 Contact Resistance: 100 mΩ max.

Mechanical & Environmental
 Operating Temperature: -40°C to +85°C
 Durability: 5000 cycles

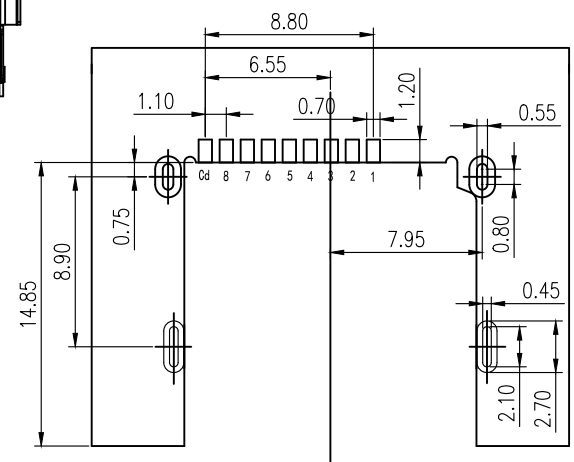



RECOMMENDED P.C.B HOLE LAYOUT
 COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

RoHS Compliant

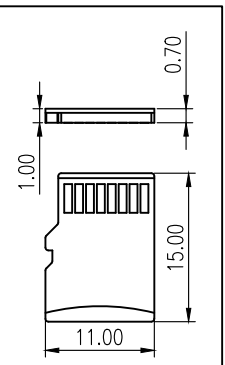

T-Flash


PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

MILLIMETERS X.° ± 2° .X ± 0.30 .XX ± 0.20 .XXX ± 0.10	INCH X.° ± 2° .X ± 0.012 .XX ± 0.008 .XXX ± 0.004	 VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
DRAWN BY: Zou Long		TITLE: TF 正向沉板0.85 (四个脚)DIP型卡座		PART NO: VTC102011492	
CHECKED BY: Bob		SIZE: A4		UNIT:mm SHEET:1 OF 2 FCN: E1	
APPROVED BY: QPF		PROJECTION 		http://www.vitalconn.com	


7		8	
REV:	ECN. NO.	NAME	DATE

NOTES



1. 每卷包装数量:1000PCS/每卷
2. 卷带包装方式:

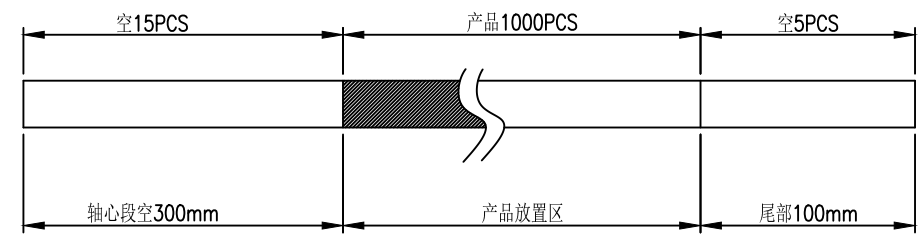

3.每箱包装数量:10000PCS/箱

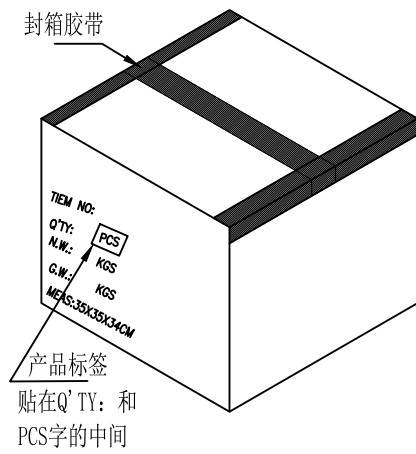

RoHS Compliant

MILLIMETERS X.° ± 2° .X ± 0.30 .XX ± 0.20 .XXX ± 0.10	INCH X.° ± 2° .X ± 0.012 .XX ± 0.008 .XXX ± 0.004	 VITALCONN <small>a vital connector company</small>	FOR YOUR VITAL CONNECTION	
TITLE: TF 正向沉板0.85 (四个脚)DIP型卡座			DRAWN BY: Zou Long	
DRAWN BY: Zou Long		PART NO: VTC102011492		REV: A
CHECKED BY: Bob		SIZE: A4	UNIT:mm	SHEET:2 OF 2 FCN: E1
APPROVED BY: QPF		PROJECTION		http://www.vitalconn.com

