

10/100 PC CARD LAN MAGNETICS SOLUTIONS MODEL NO.: TH16010S

FEATURE:

RoHS Compliant


Operating temp. : 0°C to +70°C

SPECIFICATIONS: @ 25°C


OCL : 350 uH Min @100kHz ,100mV

Transformer Turns ratio (±5%)		Insertion Loss MHz (dB MIN)	Return Loss MHz (dB MAX)			Cross Talk MHz (dB MAX)			DCMR MHz(dB MAX)			HI POT (VAC)
TX	RX		1~30	60	80	30	62	100	30	50	100	
1:1	1:1	-1.0	-16.0	-12.0	-11.0	-50	-45	-40	-35	-33	-20	1500

SCHEMATICS:

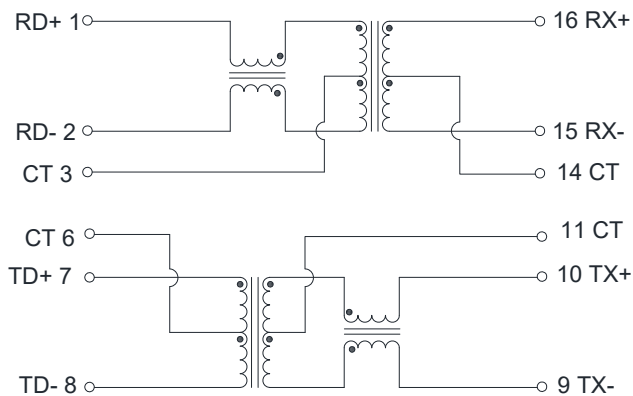

DIMENSIONS: mm;TOLERANCE:±0.25

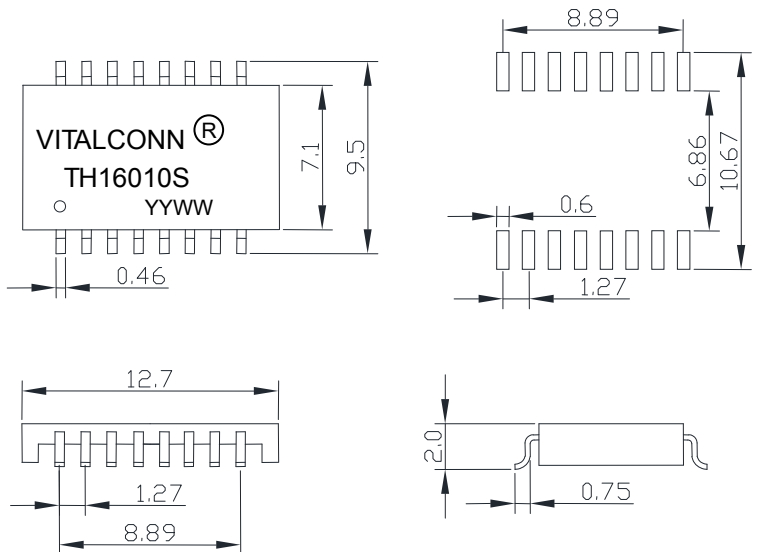

MODEL NO.: TH16010S

PACKING

1. Tape & Reel: 2000 pcs / Reel, 10000 pcs / Carton

2. Dry Pack: 1 pc.

Product Description: 5g Silica Gel Desiccant

PH: 4-8

Package Materials: Paper (Length 6.5 ± 1 cm , Width 5 ± 1 cm)

3. Reel: Vacuum Packed

4. Seal as per JEDEC

