



REV:	ECN. NO.	NAME	DATE

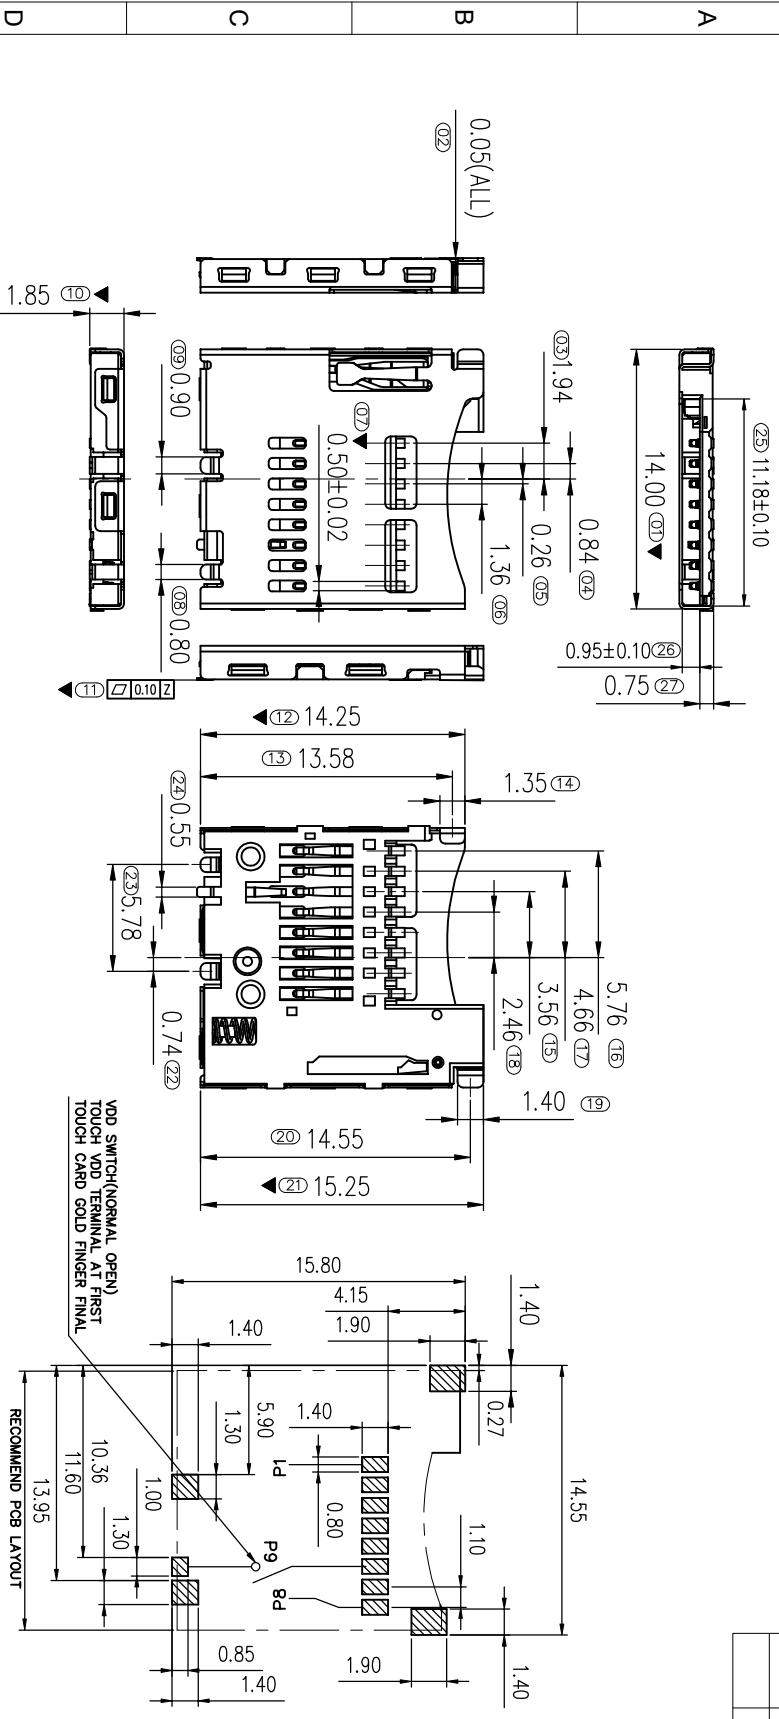


VDD SWITCH(NORMAL OPEN)  
TOUCH VDD TERMINAL AT FIRST  
TOUCH CARD GOLD FINGER FINAL

RECOMMEND PCB LAYOUT  
GENERAL TOLERANCE ±0.05

- NOTES:
1. MATERIAL:  
Housing: High Temperature Thermoplastic  
UL94V-0, Color: Black.  
Contacts: Phosphor Bronze.  
Gold Finish of Solder Tail,  $\Delta$   
Selected Gold Finish on Contact Area plating.  
Shell: Stainless.  
Gold Finish on Contact Area  
Over Nickel Plating.
  2. Electrical Characteristics:  
Operating voltage: 30V.  
Current rating: 0.3 A.  
Operating temperature: -25°C~+85°C.  
Insulation resistance: 1000M $\Omega$  Min 500V DC  
Dielectric withstanding voltage: 500 VAC/1minute.  
Contact resistance: 100m $\Omega$  Max.
  3. Mechanical characteristics:  
Insertion force: 2.0kg Max.  
Extraction force: 0.5kg Min.  
Mating durability: 10000 cycles.



Pin No.	MICRO SD
PM1	1P
PM2	2P
PM3	3P
PM4	4P
PM5	5P
PM6	6P
PM7	7P
PM8	8P
PM9	CARD DETECT



MILLIMETERS	INCH
X.° ±2°	X.° ±2°
.X ±0.38	.XX ±0.015
.XX ±0.25	.XXX ±0.010
.XXX ±0.15	.XXXX ±0.006

DRAWN BY: Long PART NO: VTC102014492 REV: A

CHECKED BY: VIT SIZE: A4 UNIT:mm SHEET: 1 OF 2 FCN: E1

APPROVED BY: QPF PROJECTION http://www.vitalconn.com



FOR YOUR VITAL CONNECTION


ROHS Compliant

For technical support, please send an email to support@vitalconn.com




REV:	ECN. NO.	NAME	DATE

NOTES

1. 每卷包装数量:1000PCS/每卷
2. 卷带包装方式:

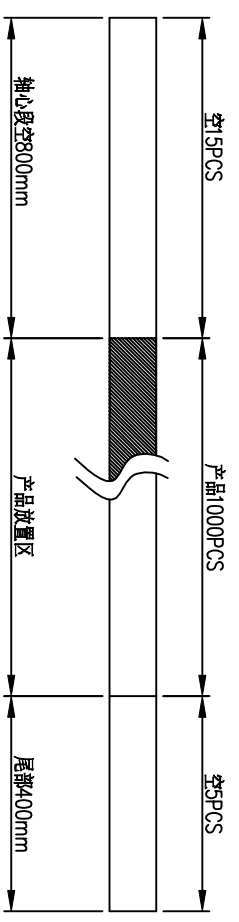

3. 每箱包装数量:10000PCS /箱

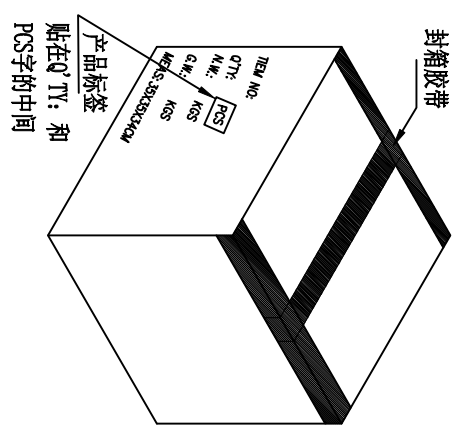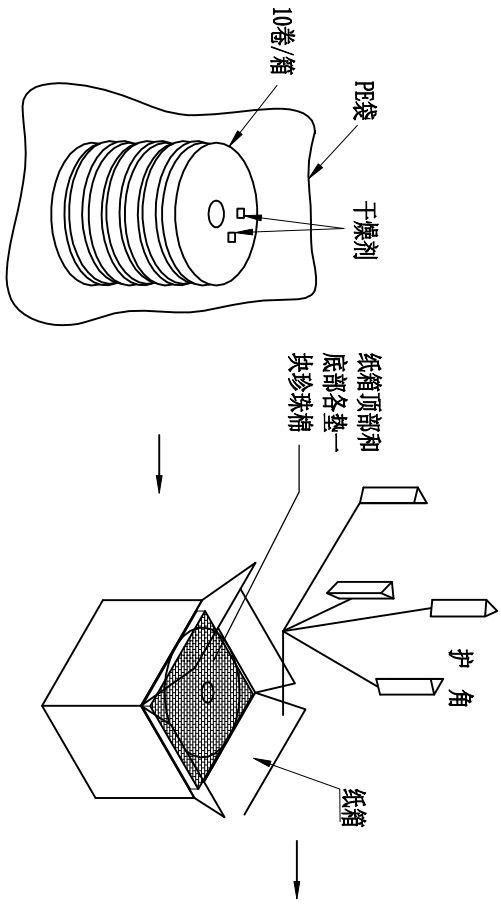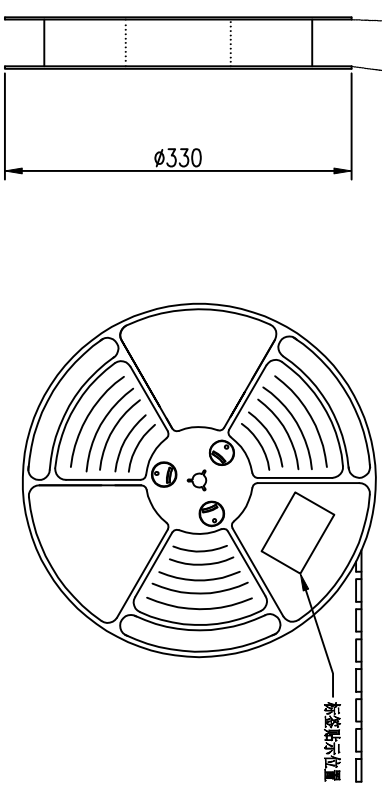

ROHS Compliant



FOR YOUR VITAL CONNECTION

MILLIMETERS	INCH
X.° ±2°	X.° ±2°
.X ±0.38	.XX ±0.015
.XX ±0.25	.XXX ±0.010
.XXX ±0.15	.XXXX ±0.006

TITLE:	1.85H P_P 1P Card带开一体式 无柱
--------	---------------------------

DRAWN BY:	Long	PART NO:	VTC102014492	REV: A
-----------	------	----------	--------------	--------

CHECKED BY:	VIT	SIZE: A4	UNIT:mm	SHEET:2 OF 2	FCN: E1
-------------	-----	----------	---------	--------------	---------

APPROVED BY:	QPF	PROJECTION	UNIT:mm	http://www.vitalconn.com
--------------	-----	------------	---------	--------------------------

For technical support, please send an email to support@vitalconn.com

A B C D E F

1 2 3 4 5 6 7 8