

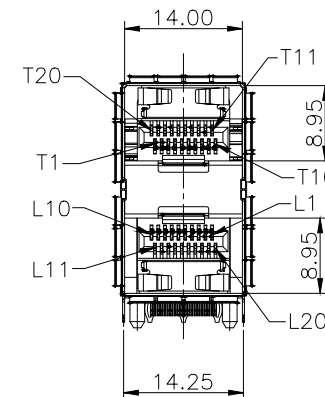


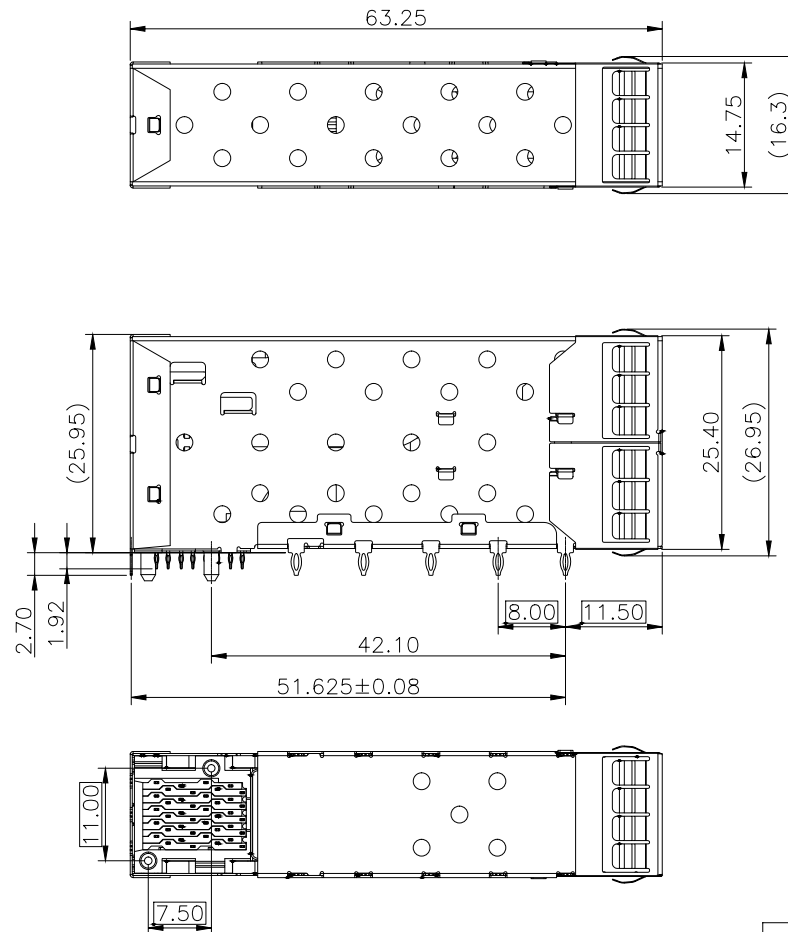

NOTES:

MATERIAL:
CAGE: NICKEL SILVER
CONNECTOR:
PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.
LIGHT PIPE: POLYCARBONATE; COLOR: CLEAR
SPRING: STAINLESS STEEL
CONTACTS: PHOSPHOR BRONZE
CONTACT PLATING: 15u" MIN. GOLD ON MATING AREA,
150u" MATTE TIN ON SOLDER TAILS
PACKAGING: TRAY PACKAGING.
TEMPERATURE RANGE: -40°C TO +85°C

REV:	ECN. NO.	NAME	DATE

CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD

GENERAL TOLERANCE
.X±0.20 .X±1°
.XX±0.15 .XX±5°
.XXX±0.10

VITALCON
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE:

SFP+ 2X1 CAGE+CONNECTOR

DRAWN BY: Zou Long

PART NO:

S2N3A23000BA4

REV: A

CHECKED BY: Bob

SIZE: A4


UNIT:mm


SHEET:1 OF 3


FCN: A4

APPROVED BY: QPF

PROJECTION

<http://www.vitalconn.com>For technical support, please send an email to support@vitalconn.com

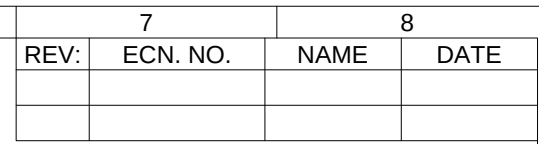


GENERAL TOLERANCE .X±0.20 .X±1° .XX±0.15 .XX±5° .XXX±0.10				FOR YOUR VITAL CONNECTION	
		TITLE:		SFP+ 2X1 CAGE+CONNECTOR	
DRAWN BY:	Zou Long	PART NO:	S2N3A23000BA4		REV: A
CHECKED BY:	Bob	SIZE: A4	UNIT:mm	SHEET:2 OF 3	FCN: A4
APPROVED BY:	QPF	PROJECTION			http://www.vitalconn.com

For technical support, please send an email to support@vitalconn.com



REV:	ECN. NO.	NAME	DATE

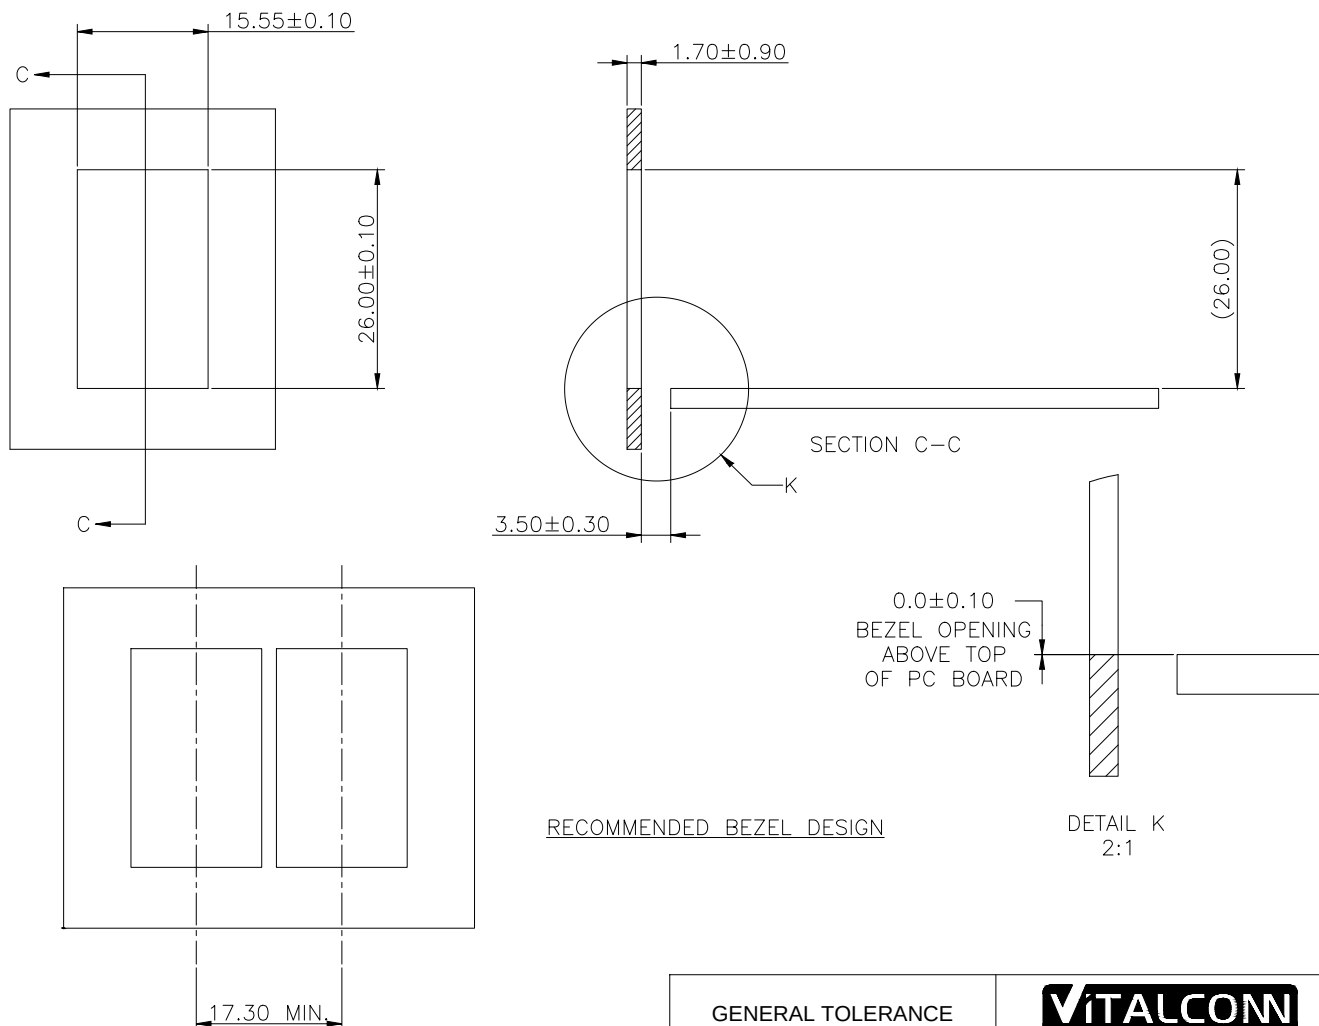

GENERAL TOLERANCE
.X $\pm$ 0.20 .X $\pm$ 1°
.XX $\pm$ 0.15 .XX $\pm$ 5°
.XXX $\pm$ 0.10



FOR YOUR
VITAL CONNECTION

TITLE: SFP+ 2X1 CAGE+CONNECTOR

DRAWN BY: Zou Long PART NO: S2N3A23000BA4 REV: A

CHECKED BY: Bob SIZE: A4 UNIT:mm SHEET:3 OF 3 FCN: A4

APPROVED BY: QPF PROJECTION <http://www.vitalconn.com>

For technical support, please send an email to support@vitalconn.com