

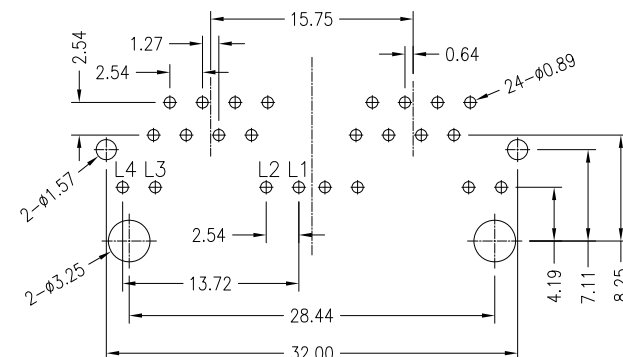


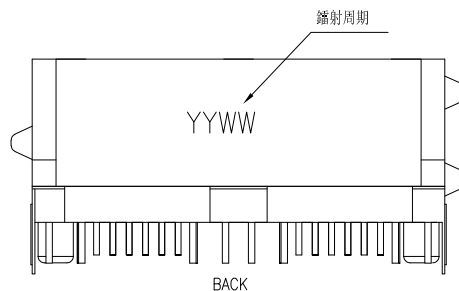

REV:	ECN. NO.	NAME	DATE

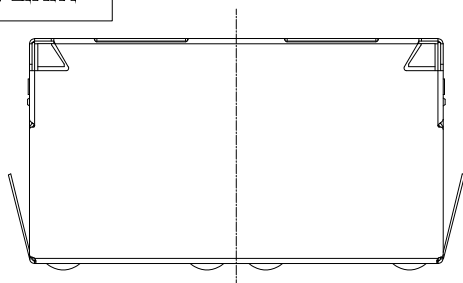

PCB LAYOUT TOLERANCE:±0.05

TOP VIEW

LED SCHEMATIC:

LEFT LED1:

GREEN
L4 +  - L3

RIGHT LED1:

YELLOW
L2 +  - L1

NOTES:

1. MATERIALS:
HOUSING: PBT BLACK(UL94V-0)
CONTACTS: PHOSPHOR BRONZE T:0.35MM
2. FINISH:
CONTACT: 50u" NICKEL UNDERPLAT ON ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
GOLD PLATED ON CONTACT AREA.
SHIELD: COPPER ALLOY T:0.20MM PLATED WITH NICKEL
3. OPERATING TEMPERATURE: -40°C ~ +85°C
4. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

GENERAL TOLERANCE
.X±0.38 X.°±2°
.XX±0.25 .X.°±1°
.XXX±0.13

Vitalconn
a vital connector company

勇于创新，志在连接
FOR YOUR VITAL CONNECTION

TITLE:

RJ45 CONNECTOR JM 1*2 PORT
W/LED, 8P8C,

DRAWN BY: Zou Long

PART NO:

JD112142TPH1

REV: A

CHECKED BY: Bob

SIZE: A4

UNIT:mm

SHEET:1 OF 1

FCN: H1

APPROVED BY:

QPF

PROJECTION



<http://www.vitalconn.com>

For technical support, please send an email to support@vitalconn.com