


REV.	ECN. NO.	NAME	DATE

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

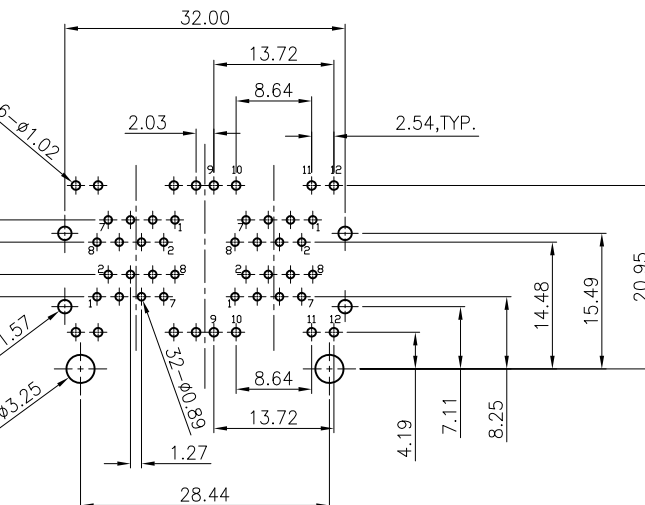

RECOMMENDED PCB LAYOUT For Wave Soldering Temperature: 260±5°C , 5 sec max.

ROHS COMPLIANT

TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm


TOLERANCE(公差) :
0.000 mm ± 0.15 mm
0.00 mm ± 0.25 mm
0.0 mm ± 0.35 mm

VITALCON
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE: RJ45 , Shielded , Receptacle,
Horizontal , 2x2 Ports , Tht , With Led G/F plated

DRAWN BY: BECKER
CHECKED BY: VTA
APPROVED BY: QPF

PART NO:	JS224141DPC7	REV: A
SIZE: A4	UNIT: mm	SHEET: 1 OF 1
PROJECTION	 http://www.vitalconn.com	

LED ELECTRICAL CHARACTERISTIC			
LED2	Green	LED1	Yellow
D1~D2		D3~D4	

4	LED		
3	Shell	SUS	Nickel Plated
2	Terminal	Phosphor Bronze	Contact Area : GOLD Plated Solder Area : Tin Plated
1	Housing	PBT	BLACK
NO.	NAME	MATERIAL	FINISH