
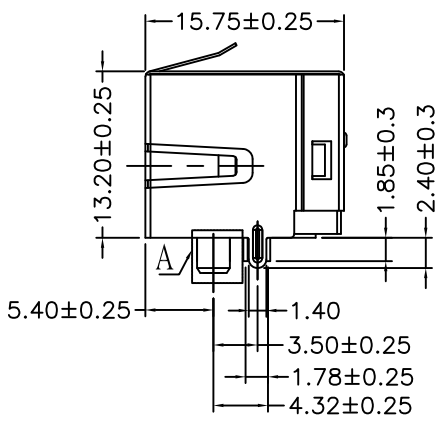


REV.	ECN. NO.	NAME	DATE

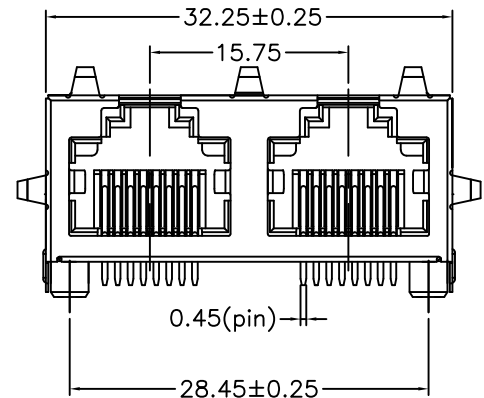



Electrical Characteristics :

Insulation Resistance : 500MΩ Min.


Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

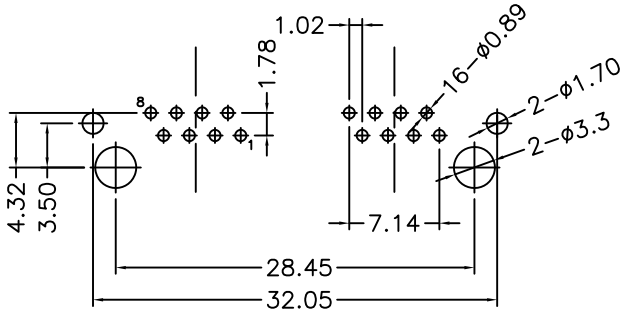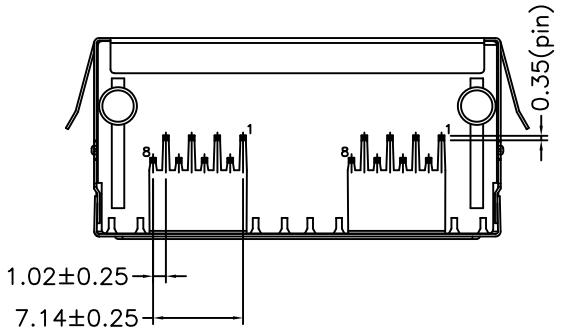


RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm



ROHS COMPLIANT

For IR Reflow Temperature: 260'C max.,10 sec max.

3	Shell	SUS304-1/2H	Nickel Plated
2	Terminal	C5210-EH	Contact Area : Gold Plated Solder Area : Tin Plated
1	Housing	PA6T	BLACK
NO.	NAME	MATERIAL	FINISH

TOLERANCE(公差) : 0.000 mm ± 0.15 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.35 mm		 a vital connector company		FOR YOUR VITAL CONNECTION	
DRAWN BY: BECKER		TITLE: RJ45 , Shielded , Receptacle, Horizontal , 1x2 Ports , Tht G/F plated		PART NO: JU124101DNC7	
CHECKED BY: VTA		SIZE: A4		UNIT: mm	
APPROVED BY: QPF		PROJECTION		SHEET:10F1	
				FCN: C7	
					
				http://www.vitalconn.com	