




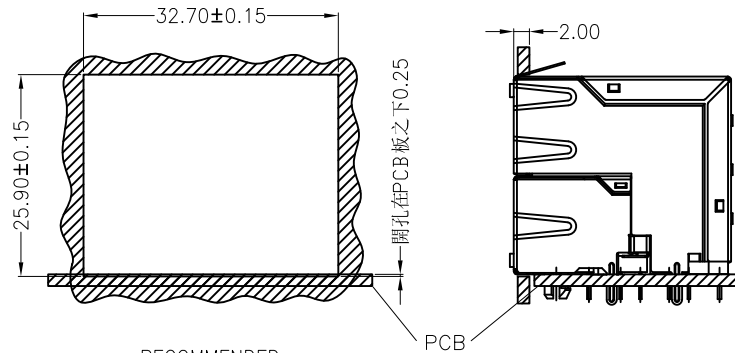

RECOMMENDED
PANEL OPENING



BACK VIEW

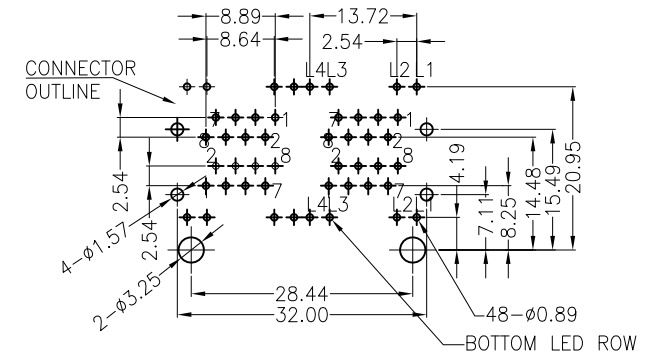

PCB LAYOUT TOLERANCE:±0.05

TOP VIEW

NOTES:

1. MATERIALS:

HOUSING: PBT BLACK(UL94V-0)

CONTACTS: PHOSPHOR BRONZE T:0.35MM

2. FINISH:

CONTACT: 50u" NICKEL UNDERPLAT ON ALL AREA,

100u"MIN. TIN ON SOLDER TAILS,

GOLD PLATED ON CONTACT AREA.

SHIELD: COPPER ALLOY T:0.20MM PLATED WITH NICKEL

3. OPERATING TEMPERATURE: -40°C ~ +85°C

4. JACK CAVITY CONFORMS TO FCC RULES AND

REGULATIONS PART 68, SUBPART F

LED SCHEMATIC:

LEFT LED1:
LEFT LED2:


RED

L4 +  - L3
GREEN

RIGHT LED1:
RIGHT LED2:

RED

L2 +  - L1
GREEN

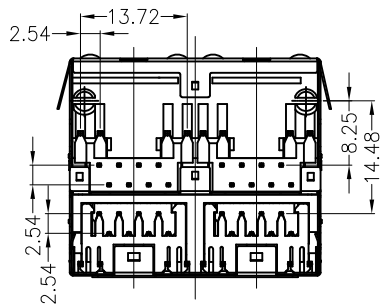

For technical support, please send an email to support@vitalconn.com

GENERAL TOLERANCE
.X±0.38 X.*±2°
.XX±0.25 .X.*±1°
.XXX±0.13

VITALCON
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE:

RJ45 CONNECTOR 2*2 PORT
W/LED, 8P8C, G/F plated

DRAWN BY: Zou Long

PART NO:

JS2241B1DPH1

REV: A

CHECKED BY: Bob

SIZE: A4

UNIT:mm

SHEET:1 OF 1

FCN: H1

APPROVED BY: QPF

PROJECTION



<http://www.vitalconn.com>