


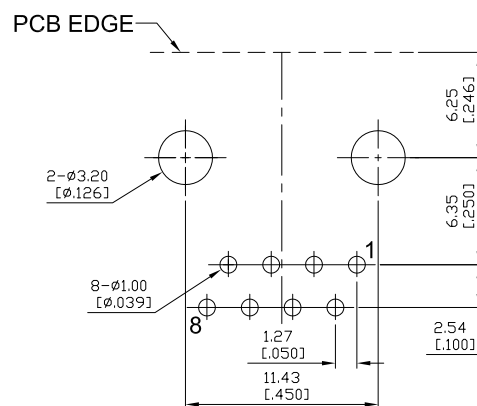
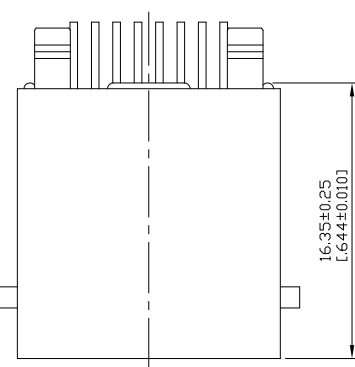
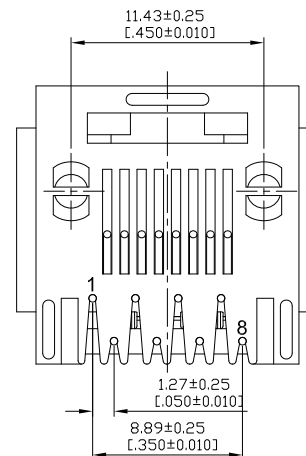


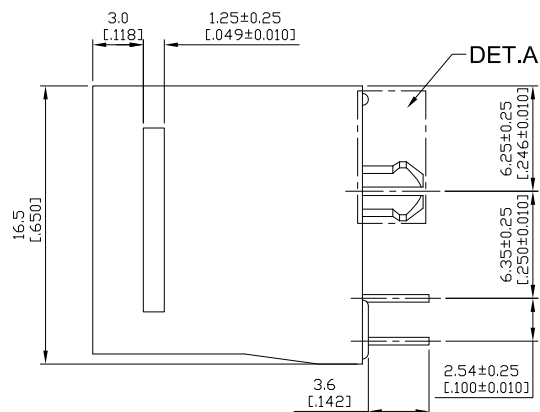

REV:	ECN. NO.	NAME	DATE
A1	----	-----	01-15-2025

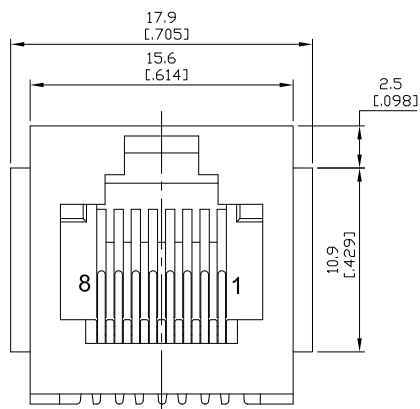

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm

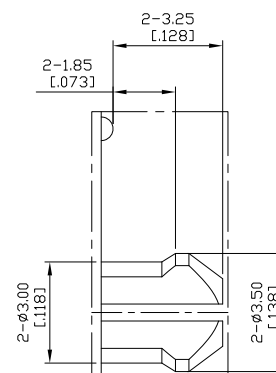


DET.A
SCALE 2:1

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 30mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing : Thermoplastic UL94V-0
Contact : Full Gold Plating
Spring Wire : Dia 0.45mm Copper Alloy
Optional Gold Plating Over Nickel

PART NO : JV112101UPC7

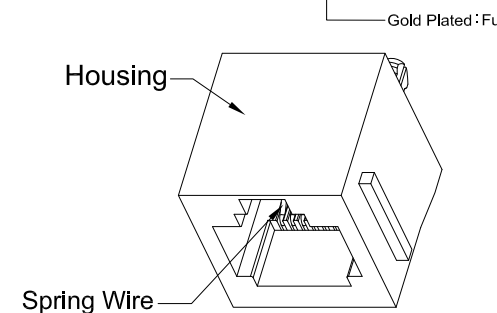

TOLERANCE(公差):
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

VITALCON
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE: RJ45, Unshielded, Receptacle,
Vertical, Single Port, THT

DRAWN BY: Zou Long

PART NO: JV112101UPC7

SHEET: 1 OF 1 REV: A1


CHECKED BY: Bob

DWG NO: VTC-TZ-00045

SIZE: A4 UNIT: mm FCN: C7

APPROVED BY: QPF

PROJECTION:



<http://www.vitalconn.com>

For technical support, please send an email to support@vitalconn.com