

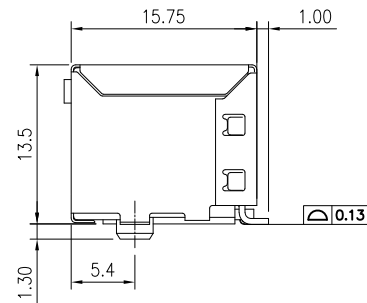

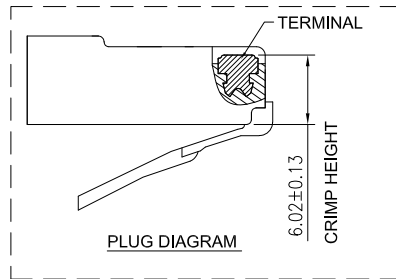

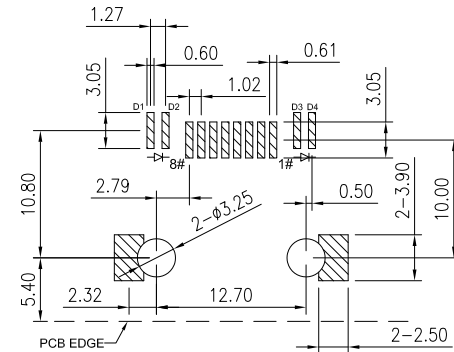


Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 30mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

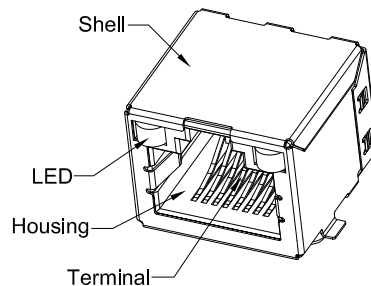

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.20±0.05mm



LED ELECTRICAL CHARACTERISTIC			
LED2	Yellow	LED1	Green
D1-D2		D3-D4	

For IR Reflow Temperature: 260°C max., 10 sec max.

4	LED		
3	SHELL	C2680-H	Nickel Plated (30 u" min)
2	TERMINAL	PHOSPHOR BRONZE	Contact Area: Gold Plated(G/F) Solder Area: Tin Plated(80u" min.) Underplating: Nickel Plated(50u" min.)
1	HOUSING	LCP	Black , UL 94V-0
NO.	NAME	MATERIAL	FINISH

TOLERANCE(公差):

0.000 mm ± 0.15 mm
0.00 mm ± 0.25 mm
0.0 mm ± 0.35 mm

VITALCON
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE:

RJ45 , Shielded , Receptacle
Horizontal , Single Port , Smt , With Led

DRAWN BY:

Zou Long

PART NO:

JM11411NPC7

SHEET:

1 OF 1

REV: A0

CHECKED BY:

Bob

DWG NO:

VTC-TZ-00137

SIZE: A4


UNIT:mm

FCN: C7

APPROVED BY:

QPF

PROJECTION:



<http://www.vitalconn.com>

For technical support, please send an email to support@vitalconn.com